






## 2291-1061 Strain Relief Connector With Full Wave Bridge Rectifier

STRAIN RELIEF (BLACK)

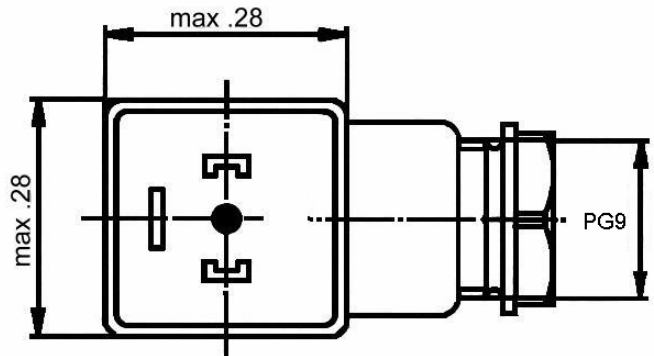

Full Wave Bridge Rectifier Circuit

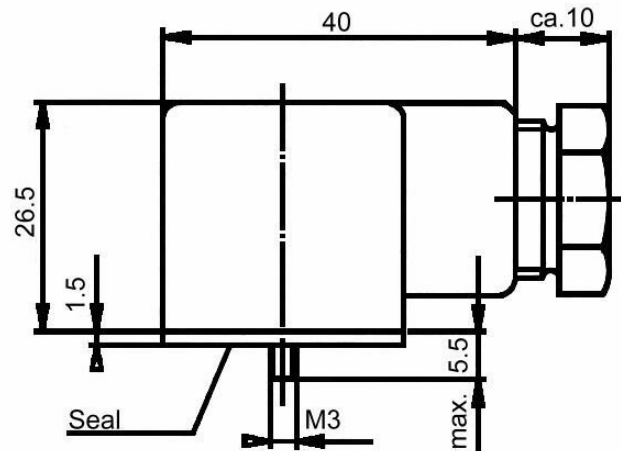

Number of Poles = 2+GRD

Contact Spacing: 18mm

Voltage:  
max. 250 VAC

Max. Current: 3 AMP

Contact Resistance: 4 Ohm

Housing Material: Polyamide Nylon Glass Reinforced

PG9 Strain Relief for cords ranging 0.240 to 0.310 in.

Protection Class: IP 65

Insulation Class: VDE 0110-1/89

Operating Temperature: -40 C to +125 C with Silicon Seal

Buna Profile gasket standard